

# Low Flow Ozone Destruct Unit

## Low Flow ozone annihilator

The unit destroys ozone present in ambient air at high flowrates. This high-flow destruct unit provides an ozone-free blanket of air around sensitive equipment and can reduce and remove the corrosive oxidant in areas with problematic ozone levels. This device will greatly improve your work efficiency.



### Features


- Lightweight and Compact Design
- Designed For Continuous Operation
- Greater than 99% Efficiency
- Long Warranty

Product ID: <b>NT-40</b> Lead Time: <b>3 days</b> Price: <b>\$995.00</b>
--

### Specifications

Flow Rate	40 CFM
Efficiency	Greater than 99%
Fan Life	100,000 Hours
Operation	Continuous or Intermittent - can operate 24-hrs/day 365 days a year
Temperature Range	-30 deg to +140 deg (F); -35 deg to +60 deg (C)
Humidity	0-90% NOTE: Excessive humidity will create nitric acid, which will shorten the life of the machine.
Noise Level	40 decibels (whisper conversation)
Spout Dimension	4-in OD inlet & outlet (1.5-in length)
Voltage	110V-220V 50/60Hz Power Required (universal adapter included)
Amperage	0.4 Amp
Warranty	3 Years!
Dimensions	21.5-in x 5-in x 5-in (LxWxH) 54.6-cm x 13-cm x 13-cm (Handle makes unit 1-in higher for a 6-in overall height)
Weight	10-lbs (4 kg)

## Simple Controls

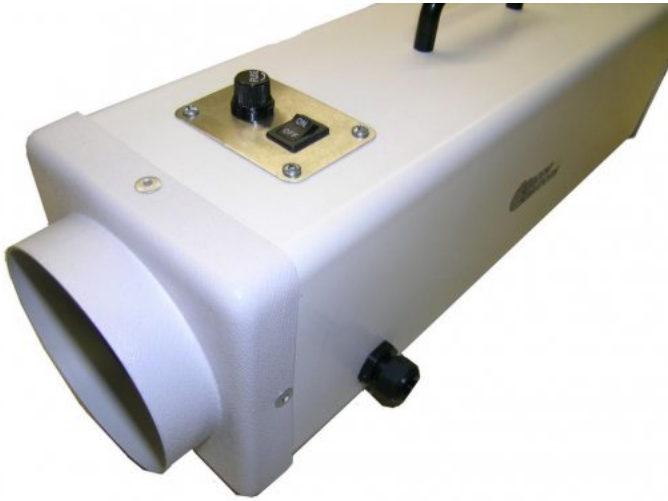

Simple On/Off switch and 1 Amp fuse allow the user to easily operate the unit and fix a problem if one develops.