

# Medium Flow Ozone Destruct Unit

## Medium Flow Ozone Destruct unit for Microarray Applications

The Ozone Interceptor destroys ozone present in ambient air at high flowrates. This high-flow destruct unit provides an ozone free blanket of air around sensitive equipment and can reduce and remove the corrosive oxidant in areas with problematic ozone levels. This ozone destruct unit will greatly improve your work efficiency.

### Features

- Lightweight and Compact Design
- High Flow Design
- Capable of Continuous Operation
- Plugs Into Standard 110 VAC Wall Outlet
- Greater Than 99% Destruction Efficiency



Product ID: <b>NT-70</b> Stock: <b>Yes</b> Price: <b>\$1,195.00</b>
---

### Input Power Option

Option	Price	*
220V/50Hz	Online Pricing	Buy Online!


### Specifications

Flow Rate	70 CFM
Fan Life	100,000 Hours
Operation	Continuous or Intermittent - can operate 24-hrs/day 365 days a year
Voltage	120V/60Hz (220V/50Hz available upon request for no extra charge)
Amperage	0.5 Amp
Temperature Range (operating & storage)	-30 deg to +140 deg (F); -35 deg to +60 deg (C)
Humidity	0-90% NOTE: Excessive humidity will create nitric acid, which will shorten the life of the machine.
Spout Dimension	4-in OD inlet & outlet (1.5-in length)
Noise Level	40 decibels (whisper conversation)
Efficiency	Greater than 99%
Warranty	1 Year
Dimensions	21.5-in x 5-in x 5-in (LxWxH) 54.6-cm x 13-cm x 13-cm (Handle makes unit 1-in higher for a 6-in overall height)
Weight	11-lbs (5 kg)



The NT-40, NT-70 and NT-400 Destroys the Ozone quickly on-site or in Pack-Out Rooms for quicker entrance.

## Isometric View

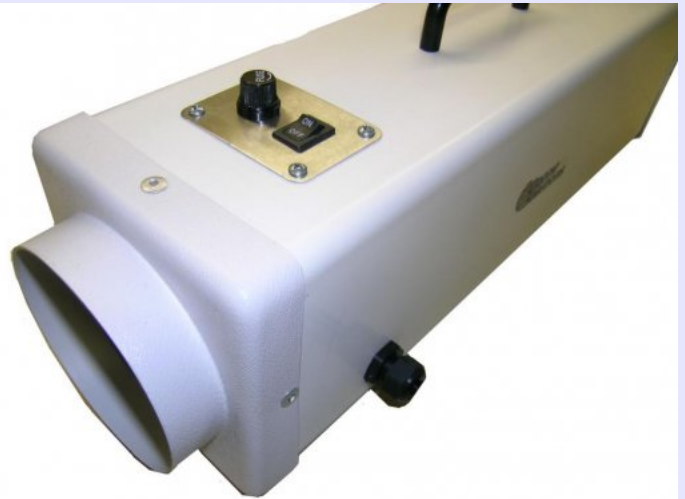

Simple On/Off Switch and 1 Amp fuse allows easy user control.