

30 SCFM Ozone Destruct Unit

All Stainless Steel Construction

This destruct unit is made of ozone resistant 304 & 316L stainless steel. Excellent for high flow ozone off-gassing applications. Heater band ensures that water vapor does not condense on the catalyst. This results in years of efficient operation.



Features

- 30-SCFM Flowrate Capacity
- 99.9% Efficient
- 2-in NPT inlet & outlet
- Stainless Steel Construction
- one year warranty
- simple efficient design ensures extended operation
- requires 110V/60Hz power
- \$2,250 for orders of 2 or more
- \$2,000 for orders of 5 or more

Product ID: **ODS-30H**
Lead Time: **2 weeks**
Price: **\$2,500.00**


Specifications

Maximum Flowrate	30 SCFM (standard cubic feet per minute) [850 lpm]
Power Consumption	150 Watts
Pressure Drop	less than 1 PSI
Inlet/Outlet Ports	2-in NPT
Outdoor Installation	Yes - no protection required
Dimensions	14-in wide (at widest point) x 18-in high (36-cm x 45.7-cm high)
Weight	45-lbs (20.5 kg) NOTE - This does not include the 30 lbs. of catalyst.
Warranty:	[link url="http://www.ozonesolutions.com/Limited_Warranty.html"]1 year[/link]

Bottom of ODS-30H



ODS-30H In Use

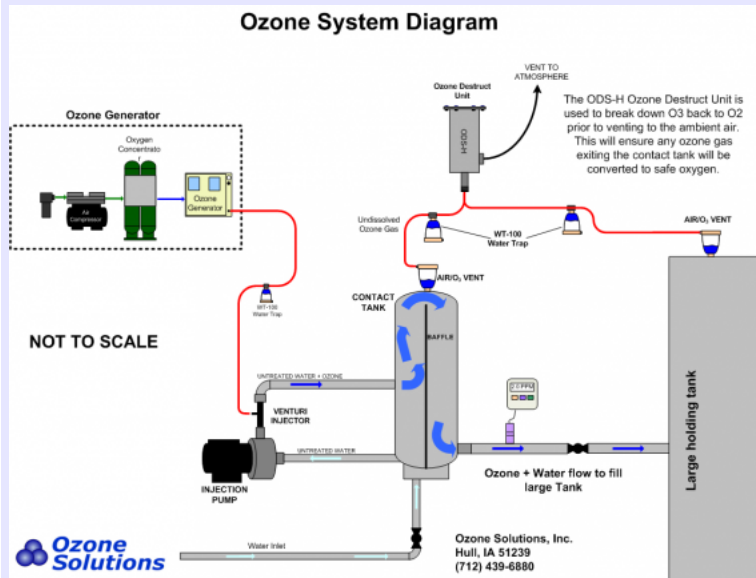

This diagram shows an example of the typical installation of the ODS-30H Ozone Destruct Unit.

These Ozone Destruct Units are used where the ozone/air stream will be wet, or have a high humidity level.

As the large tank fills with water, the displacement rate of water may be very high. This may force the need of an ozone destruct unit as large as the ODS-30H.

Top of ODS-30H



ODS-30H On/Off Switch

