

Portable Ozone Monitor for Rent

Portable Handheld Ozone Monitor

The easy to use portable OMC-1108 Ozone Monitor is now available for rental. The OMC-1108 ozone monitor is light weight, reliable and very responsive to changes in ozone levels. Available with a range as low as 0.01 ppm - 9.99 ppm. Warm up time is less than 2 minutes.

The OMC-1108 can be shipped anywhere in the US, Mexico, or Canada for rental needs. Reduced rental rates are also available for longer period of times, call for details.



Features

- Cost effective ozone monitor rental
- Reduced rates available for longer term rentals
- Ready to Use Upon Delivery
- Quick responding
- large digital display
- portable - 1 lb weight
- less than 2 minute warm-up time

Product ID: **OMC-1108 Rental**
 Stock: **Yes**

Returning the Unit

The return method is up to you, but we offer this simple option:

Option	Advantage to You	Price	*
Prepaid UPS Return Label	A UPS Return Label comes with the Ozone Generator saving you time and hassle. Just slap the label on the outside of the box when you are ready to return the generator and bring it to a UPS drop box.	Online Pricing	Buy Online!

Specifications

Rental Information

Rental Terms:	Rental period starts when unit arrives, and ends when it is shipped back. The shipping time does not count against the rental period.
Availability:	We have 3 OMC-1108 Ozone Monitors Available for rent, there is a very good chance we have one in stock ready to ship to you!
Shipping Method:	OMC-1108 ships in a small cardboard box via UPS, Fed-Ex, or USPS.
Return Shipping:	OMC-1108 is shipped in all reusable shipping materials. Simply repackage the OMC-110 in the original shipping material and ship back via standard parcel service.
Shipping Cost:	Please use the calculate shipping option on the top of this page.
Shipping Weight:	2 lbs

Product Specifications

Accuracy:	+/- 5-10%
Sensor Type *	Electrochemical Cell
Sensor Life:	1.5 to 2-years (average)
Range:(2-choices)	0.01 to 9.99 ppm in 0.01-PPM increments (default range) 0.1-150.0 PPM in 0.1-PPM increments
Operating Temp.:	0-deg C to 40-deg C (32-deg F to 104-deg F)
Storage Temp.:	-20 deg C to 50 deg C (-4 deg F to 122 deg F)
Humidity Range:	0 to 80%
Display:	Digital readout
Alarm:	(optional) Audio - Piezoelectric buzzer, 85 dB @ 1ft

Visual - Red LED (set only by request)
 Power Supply - 9VDC (wall adapter not included)

Datalogger Capability




Simply connect the DL-2 datalogger into the side of unit for instant recording of ozone levels. Datalogger can store up to **43,000** data points.

OMC-1108 Belt Clip



The OMC-1108 can be used as personal safety device to warn of ozone concentrations over the OSHA limit of 0.1 PPM average for an eight hour day. The OMC-1108 has an audible alarm that can be set at any point that is desired within the 0.01 to 9.99 concentration range.

OMC-1108 in Chamber

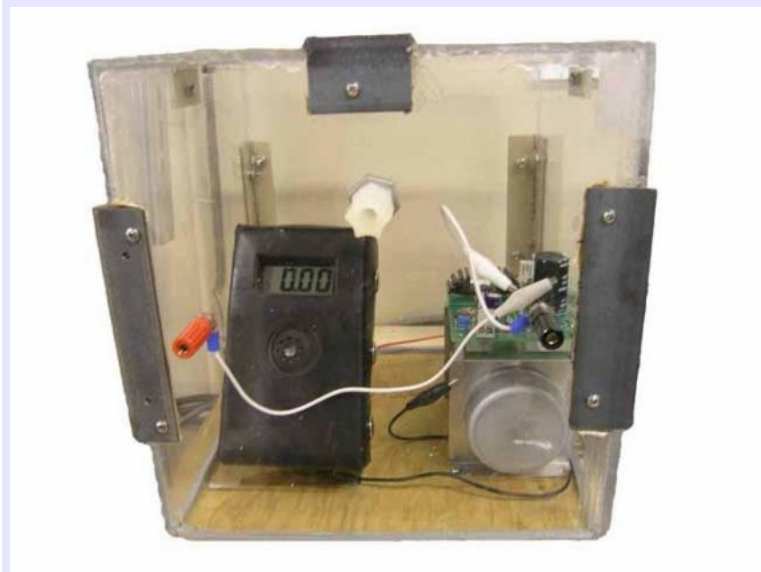

Using the DL-2 datalogger with the OMC-1108 allows you to monitor and record your ozone concentrations over a period of time. This can be used in laboratory or working areas to chart fluctuating ozone levels.

OMC-1108 Leak Detection



Using the OMC-1108 as a leak detector for ozone generation equipment can alert technicians of possible leaks. The OMC-1108 can help make system troubleshooting easier by making leak detection quick and easy.

OMC-1108 Leather Case



The leather protective case that comes with all OMC-1108s ensures the unit can withstand the daily bumps & bangs. Leather case comes with a high strength belt clip on the back for securing to a users waist.

Ozone Meter Front View



The OMC-1108 has a large digital display easily viewed from several feet away. The red LED on the top also will flash when the alarm set point (optional) is exceeded. An audio alarm also sounds when this set point has been reached.