

UV-100 Accessories



The UV-100 comes with an AC adapter, software, calibration sheet, users manual USB adapter and short PTFE tubing.

UV-100 Rear View



Rear view of UV-100 shows ozone inlet, NO/NC relay connections, USB & RS-232 ports and ON/OFF switch.

UV-100 Readings



DL-2 with the UV-100



Attaching the DL-2 to the UV-100 allows you to record 43,000 more data points and gives you more flexibility in how the data is recorded. The DL-2 also comes with easy-to-use Windows software so that you can view and display the data on your computer.

UV-100 in CUV-1 Case




UV-100 in carrying case (CUV-1) with adapter/charger, rechargeable battery and accessories. (carry case not included with UV-100, see the bottom of the UV-100 page for a link to this product.)

CUV-1 Carry Case



CUV-1 Carry Case for the UV-100 Ozone Analyzer

RS-232 Pinout for connecting to other equipment

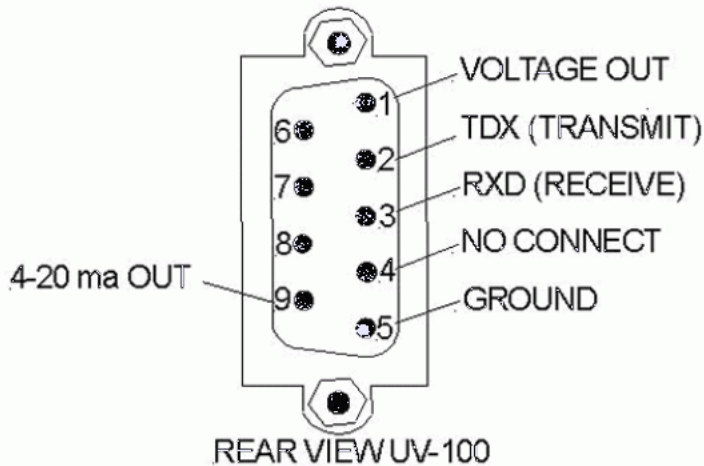

OUTPUTS TO EXTERNAL EQUIPMENT

0-2.5 volts DC - (X V = full ppm scale) Pins 1 and 5

4-20 mA - (4 mA = 0 ppm, 20 mA = full scale)
Pins 9 and 5

This picture gives you a quick reference as to the pinout connections for using the built-in 0-2.5 volts DC and the 4-20 mA signals.