


SL Series Safety Indicator Lights



The SL series safety indicating lights provide a quick visual reference to the ozone concentration within its surrounding area. The SL series can be used to determine if an environment is within the OSHA limit of 0.1ppm over an 8 hour day.

Features

- Sealed ABS plastic enclosure
- Stackable color lenses in multiple colors
- Wall mountable
- Internal HMOS ozone sensor
- 1 year warranty
- 120V / 60 Hz power
- Power cord included

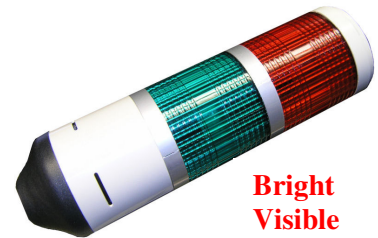

Bright Visible Colors!

Model #	Number of Indicating lights	Weight (lbs.)	Dimensions (WxDxH) (inches) including light	Unit Price
SL-1	1 w/ optional color	4.3	5.5 x 3.75 x 20	\$395
SL-2	2 w/ optional colors	4.4	5.5 x 3.75 x 22	\$895

SL-1 is only a remote light for an external sensor- Sensor is not included

Optional Colors: Red, Green, Amber, or Clear

Flashing red light option - \$35

230V/ 50 Hz power - \$50

120V - 5A Power Receptacle * (not shown) - \$95

SL-1 should be used with the R-20 Relay and a Series-300 or Series-500 ozone monitor. External light can be triggered at any concentration from 0.01 to 5.00 PPM.

SL-2 is a self contained Ozone sensor, relay and set of two indicating lights that can be set to illuminate at concentrations between a 0.03ppm and 0.1ppm ozone concentration.

* Power receptacle can be wired in parallel with green or red light relay to turn on external equipment such as an ozone generator or ozone destruct unit, respectively.



Sensor Element
Air Inlet



Visible from over 150-ft away!

Ozone Solutions, Inc.
Sioux Center, IA USA
Ph: (712) 722-0337
Fax: (712) 722-1787
www.ozoneapplications.com