
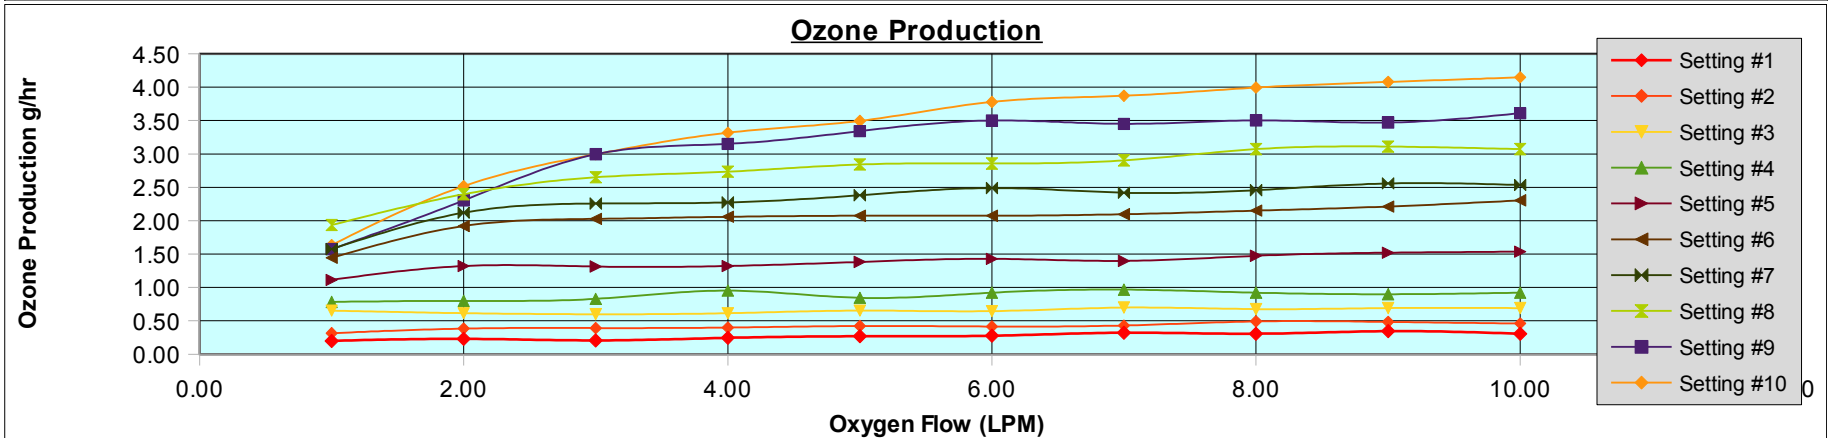


# Ozone Generator Performance Chart

OZV-8S Ozone Generator operating on Dry Air feed gas

LPM Dry Air	% O3	g/hr	% O3	g/hr	% O3	g/hr	% O3	g/hr	% O3	g/hr	% O3	g/hr	% O3	g/hr	% O3	g/hr	% O3	g/hr	% O3	g/hr
	Setting #1		Setting #2		Setting #3		Setting #4		Setting #5		Setting #6		Setting #7		Setting #8		Setting #9		Setting #10	
1.00	0.26	0.20	0.41	0.31	0.85	0.65	1.02	0.78	1.45	1.11	1.88	1.44	2.05	1.57	2.52	1.94	2.05	1.57	2.13	1.64
2.00	0.15	0.23	0.25	0.38	0.40	0.61	0.52	0.80	0.86	1.32	1.25	1.92	1.38	2.12	1.56	2.40	1.50	2.30	1.64	2.52
3.00	0.09	0.21	0.17	0.39	0.26	0.60	0.36	0.83	0.57	1.31	0.88	2.03	0.98	2.26	1.15	2.65	1.30	3.00	1.30	3.00
4.00	0.08	0.25	0.13	0.40	0.20	0.61	0.31	0.95	0.43	1.32	0.67	2.06	0.74	2.27	0.89	2.73	1.00	3.15	1.08	3.32
5.00	0.07	0.27	0.11	0.42	0.17	0.65	0.22	0.84	0.36	1.38	0.54	2.07	0.62	2.38	0.74	2.84	0.87	3.34	0.91	3.49
6.00	0.06	0.28	0.09	0.41	0.14	0.65	0.20	0.92	0.31	1.43	0.45	2.07	0.54	2.49	0.62	2.86	0.75	3.50	0.82	3.78
7.00	0.06	0.32	0.08	0.43	0.13	0.70	0.18	0.97	0.26	1.40	0.39	2.10	0.45	2.42	0.54	2.90	0.63	3.45	0.72	3.87
8.00	0.05	0.31	0.08	0.49	0.11	0.68	0.15	0.92	0.24	1.47	0.35	2.15	0.40	2.46	0.50	3.07	0.57	3.50	0.65	3.99
9.00	0.05	0.35	0.07	0.48	0.10	0.69	0.13	0.90	0.22	1.52	0.32	2.21	0.37	2.56	0.45	3.11	0.50	3.47	0.59	4.08
10.00	0.04	0.31	0.06	0.46	0.09	0.69	0.12	0.92	0.20	1.54	0.30	2.30	0.33	2.53	0.40	3.07	0.47	3.61	0.54	4.15

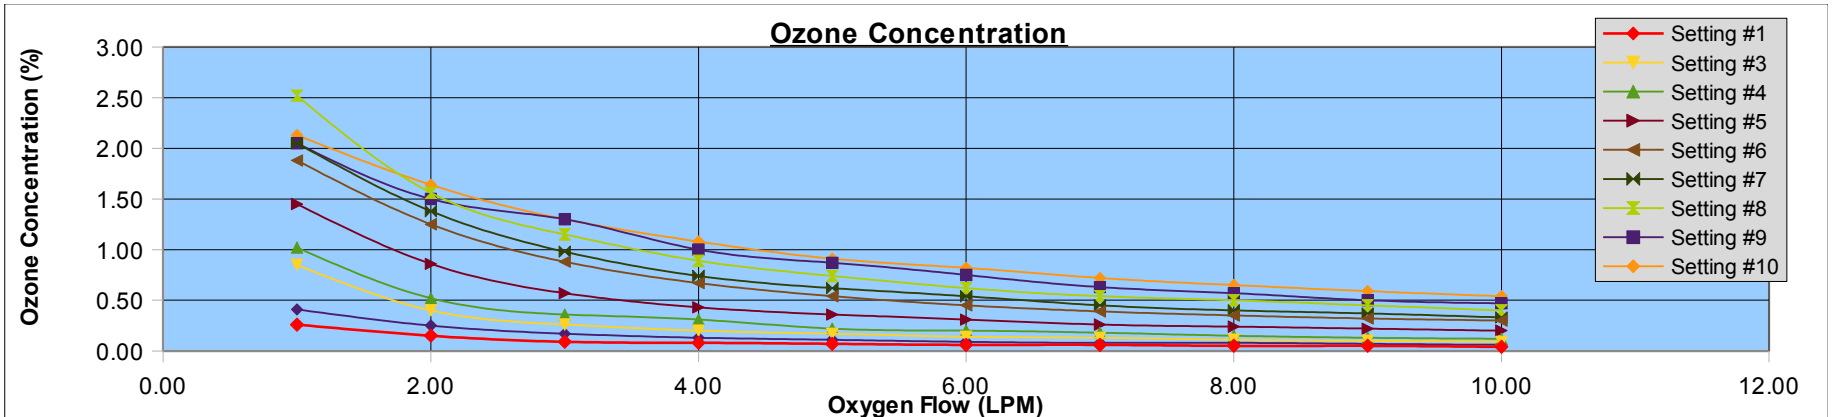

Test was performed at 72°F, Generator was ON for more than 1 hour.  
 Ozone Analyzer API-460H & API-454