

Stainless Steel Water Trap

Ozone Compatible Water Trap

This is a stainless steel, corrosion resistant water trap. It is ozone compatible and very durable. The WT-200 is able to withstand high pressure and has a welded body, which prevents any leaks from occurring. It is extremely reliable and can handle adverse conditions, both internally and externally.



Features

- All Stainless Steel
- Very Durable
- Long Lasting, Reliable Performance
- Welded Seams Prevent Leaks

Product ID: **WT-200**

Stock: **Yes**

Price: **\$273.90**

Specifications

Connections: 1/4-in barb fittings (ozone inlet & ozone outlet)
(other connections available upon request)

Mounting: bracket included to mount with 2 bolts

The WT-200 uses the common AV-SS air vent to trap and remove any water. We are providing you with a stainless steel tee, bracket, and all the fittings you need for operation.

Maintenance: None Required

Seals: No seals

Wetted Parts: 440 and 304 Stainless-Steel

Dimensions: 13.5 x 5 x 3.5-in (HxWxD) 34 x 13 x 9-cm

Weight: 2-lbs (1-kg)

Water Trap Diagram


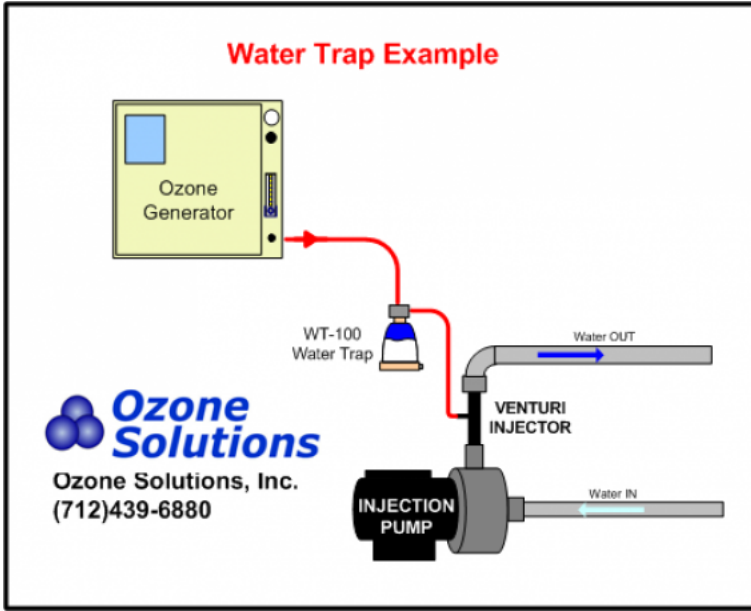


Diagram illustrates how the Water Trap can be used to protect the ozone generator from water backing up from the Venturi Injector.

Water Trap Instructions

Installation Instructions for Water Trap

- Mount Water Trap at least 12-inches below ozone generator making sure that it is not above any electrical or mechanical equipment.
- Ensure that water flowing out of the Water Trap can escape to a drain. If mounted inside an enclosure, drill a 1/2-in diameter hole in the lowest part of the enclosure.

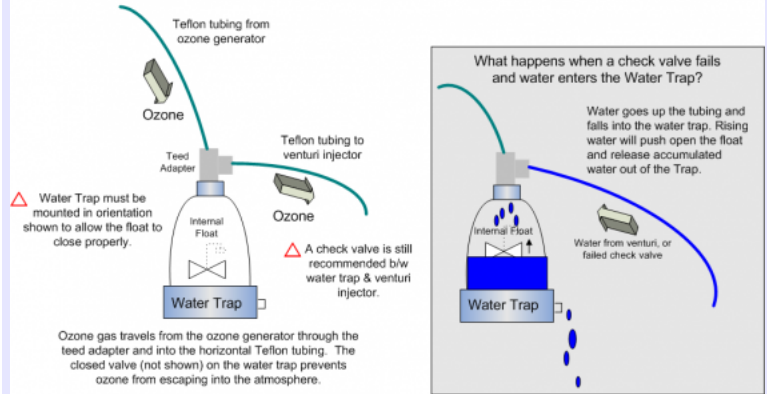

These diagrams show the function of the Water Trap